

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093309 A1

(51) International Patent Classification⁷: **F16L 15/00**

(74) Agent: **ROUSSET, Jean-Claude**; Cabinet Netter, 36, avenue Hoche, F-75008 Paris (FR).

(21) International Application Number:
PCT/EP2005/003086

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 22 March 2005 (22.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0403147 26 March 2004 (26.03.2004) FR

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicants (*for all designated States except US*): **VAL-LOUREC MANNESMANN OIL & GAS FRANCE** [FR/FR]; 54, rue Anatole France, F-59620 Aulnoye Aymeries (FR). **SUMITOMO METAL INDUSTRIES, LTD** [JP/JP]; 5-33 Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka 541-0041 (JP).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **ROUSSIE, Gabriel** [FR/FR]; 6, rue Hautebois, F-59242 Cappelle en Pévèle (FR). **MASSAGLIA, Jacky** [FR/FR]; Résidence le Bas Marais, 92, rue Henri Durre, F-59880 Saint-Saulve (FR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **THREADED TUBULAR CONNECTION WHICH IS RESISTANT TO BENDING STRESSES**

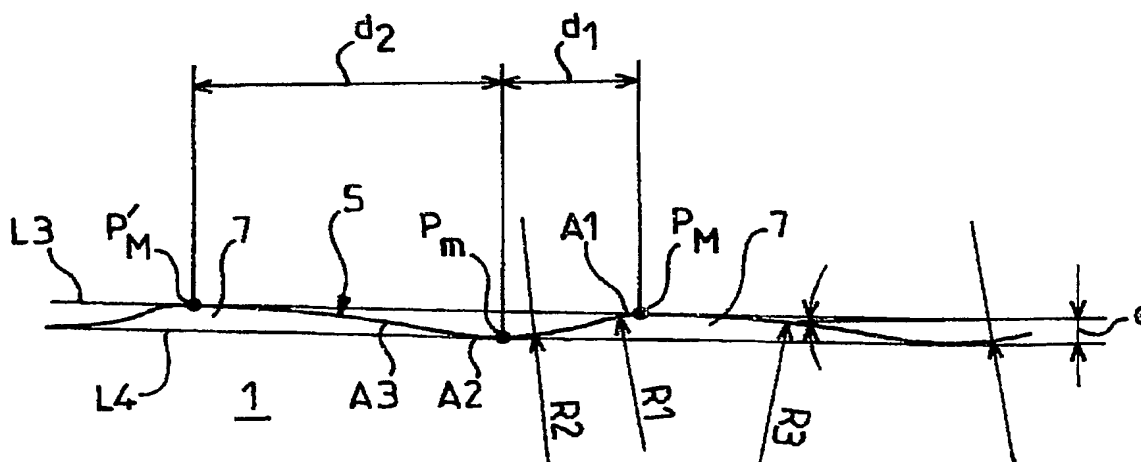

(57) Abstract: A threaded tubular connection comprises a male tubular element comprising a male threaded portion and a female tubular element comprising a female threaded portion which cooperates by screwing with the male threaded portion. In accordance with the invention, the threaded connection comprises at least one transfer zone which can transfer bending loads between said elements and which is axially spaced from said threaded portions, in which the male and female elements have an undulating surface and a smooth surface facing each other, the undulating surface (5) defining a series of rounded annular ribs (7) which come into contact with the smooth surface with a radial interference fit. Application to production strings for hydrocarbon wells.

WO 2005/093309 A1